

**Alinabal Motion Transfer Devices**

28 Woodmont Road


Milford, CT 06460 US

Tel: 203.877.3241 • Fax: 203.877.3745

Email: info@alinabalmtd.com • Website: www.alinabalmtd.com

**P Series Rod Ends**

Steel housing and ball with injection molded nylon race.

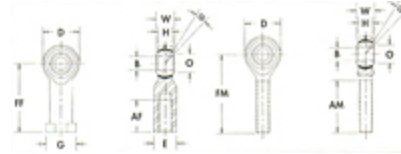

Results 1 - 25 of 114

Item #	Thread Type	Ball Bore B	Ball Width W	Base to Center FF/FM	Head Diameter D	Thread UNF-2 Class	Ultimate (Radial) Static Load Rating
PM-3-G	Male Right Hand Thread	0.1900 in	0.312 in	1.250 in	0.6250 in	10"-32	1150 lb
PM-4-G	Male Right Hand Thread	0.2500 in	0.375 in	1.562 in	0.7500 in	1/4"-28	1600 lb
PM-5-G	Male Right Hand Thread	0.3125 in	0.437 in	1.875 in	0.8750 in	5/16"-24	2700 lb
PM-6-G	Male Right Hand Thread	0.3750 in	0.500 in	1.938 in	1.0000 in	3/8"-24	3200 lb
PM-7-G	Male Right Hand Thread	0.4375 in	0.562 in	2.125 in	1.1250 in	7/16"-20	3750 lb
PM-8-G	Male Right Hand Thread	0.5000 in	0.625 in	2.438 in	1.3120 in	1/2"-20	5800 lb
PM-10-G	Male Right Hand Thread	0.6250 in	0.750 in	2.625 in	1.5000 in	5/8"-18	7050 lb
PM-12-G	Male Right Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	8800 lb
PML-3-G	Male Left Hand Thread	0.1900 in	0.312 in	1.250 in	0.6250 in	10"-32	1150 lb
PML-4-G	Male Left Hand Thread	0.2500 in	0.375 in	1.562 in	0.7500 in	1/4"-28	1600 lb
PML-5-G	Male Left Hand Thread	0.3125 in	0.437 in	1.875 in	0.8750 in	5/16"-24	2700 lb
PML-6-G	Male Left Hand Thread	0.3750 in	0.500 in	1.938 in	1.0000 in	3/8"-24	3200 lb

PML-7-G	Male Left Hand Thread	0.4375 in	0.562 in	2.125 in	1.1250 in	7/16"-20	3750 lb
PML-8-G	Male Left Hand Thread	0.5000 in	0.625 in	2.438 in	1.3120 in	1/2"-20	5800 lb
PML-10-G	Male Left Hand Thread	0.6250 in	0.750 in	2.625 in	1.5000 in	5/8"-18	7050 lb
PML-12-G	Male Left Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	8800 lb
PF-3-G	Female Right Hand Thread	0.1900 in	0.312 in	1.062 in	0.6250 in	10"-32	1200 lb
PF-4-G	Female Right Hand Thread	0.2500 in	0.375 in	1.312 in	0.7500 in	1/4"-28	1650 lb
PF-5-G	Female Right Hand Thread	0.3125 in	0.437 in	1.375 in	0.8750 in	5/16"-24	2800 lb
PF-6-G	Female Right Hand Thread	0.3750 in	0.500 in	1.625 in	1.0000 in	3/8"-24	3250 lb
PF-7-G	Female Right Hand Thread	0.4375 in	0.562 in	1.812 in	1.1250 in	7/16"-20	3800 lb
PF-8-G	Female Right Hand Thread	0.5000 in	0.625 in	2.125 in	1.3120 in	1/2"-20	6400 lb
PF-10-G	Female Right Hand Thread	0.6250 in	0.750 in	2.500 in	1.5000 in	5/8"-18	7100 lb
PF-12-G	Female Right Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	9000 lb
PFL-3-G	Female Left Hand Thread	0.1900 in	0.312 in	1.062 in	0.6250 in	10"-32	1200 lb

Results 1 - 25 of 114