

Alinabal Motion Transfer Devices

28 Woodmont Road


Milford, CT 06460 US

Tel: 203.877.3241 • Fax: 203.877.3745

Email: info@alinabalmtd.com • Website: www.alinabalmtd.com

V Series Rod Ends

Four piece construction, oil impregnated phosphor bronze race.

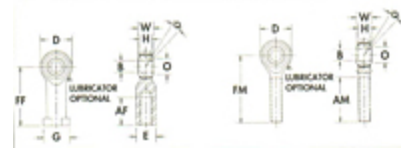

Results 1 - 25 of 176

Item #	Thread Type	Ball Bore B	Ball Width W	Base to Center FF/FM	Head Diameter D	Thread UNF-2 Class	Ultimate (Radial) Static Load Rating
VM-3-G	Male Right Hand Thread	0.1900 in	0.312 in	1.250 in	0.7500 in	10"-32	1600 lb
VM-4-G	Male Right Hand Thread	0.2500 in	0.375 in	1.562 in	0.7500 in	1/4"-28	2250 lb
VM-5-G	Male Right Hand Thread	0.3125 in	0.437 in	1.875 in	0.8750 in	5/16"-24	2850 lb
VM-6-G	Male Right Hand Thread	0.3750 in	0.500 in	1.938 in	1.0000 in	3/8"-24	3900 lb
VM-7-G	Male Right Hand Thread	0.4375 in	0.562 in	2.125 in	1.1250 in	7/16"-20	5300 lb
VM-8-G	Male Right Hand Thread	0.5000 in	0.625 in	2.438 in	1.3120 in	1/2"-20	7400 lb
VM-10-G	Male Right Hand Thread	0.6250 in	0.750 in	2.625 in	1.5000 in	5/8"-18	9350 lb
VM-12-G	Male Right Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	10450 lb
VML-3-G	Male Left Hand Thread	0.1900 in	0.312 in	1.250 in	0.7500 in	10"-32	1600 lb
VML-4-G	Male Left Hand Thread	0.2500 in	0.375 in	1.562 in	0.7500 in	1/4"-28	2250 lb
VML-5-G	Male Left Hand Thread	0.3125 in	0.437 in	1.875 in	0.8750 in	5/16"-24	2850 lb
VML-6-G	Male Left Hand Thread	0.3750 in	0.500 in	1.938 in	1.0000 in	3/8"-24	3900 lb
VML-7-G	Male Left Hand Thread	0.4375 in	0.562 in	2.125 in	1.1250 in	7/16"-20	5300 lb
VML-8-G	Male Left Hand Thread	0.5000 in	0.625 in	2.438 in	1.3120 in	1/2"-20	7400 lb

VML-10-G	Male Left Hand Thread	0.6250 in	0.750 in	2.625 in	1.5000 in	5/8"-18	9350 lb
VML-12-G	Male Left Hand Thread	0.7500 in	0.875 in	2.875 in	1.7500 in	3/4"-16	10450 lb
VMS-3-G	Male Right Hand Thread	N/A	0.312 in	1.250 in	0.7500 in	10"-32	250 lb
VMS-3-GR	Male Right Hand Thread	N/A	0.312 in	1.250 in	0.7500 in	10"-32	350 lb
VMS-4-G	Male Right Hand Thread	N/A	0.375 in	1.562 in	0.7500 in	1/4"-28	550 lb
VMS-4-GR	Male Right Hand Thread	N/A	0.375 in	1.562 in	0.7500 in	1/4"-28	850 lb
VMS-5-G	Male Right Hand Thread	N/A	0.437 in	1.875 in	0.8750 in	5/16"-24	1050 lb
VMS-5-GR	Male Right Hand Thread	N/A	0.437 in	1.875 in	0.8750 in	5/16"-24	1600 lb
VMS-6-G	Male Right Hand Thread	N/A	0.500 in	1.938 in	1.0000 in	3/8"-24	1500 lb
VMS-6-GR	Male Right Hand Thread	N/A	0.500 in	1.938 in	1.0000 in	3/8"-24	2400 lb
VMS-7-G	Male Right Hand Thread	N/A	0.562 in	2.125 in	1.1250 in	7/16"-20	1800 lb

Results 1 - 25 of 176